


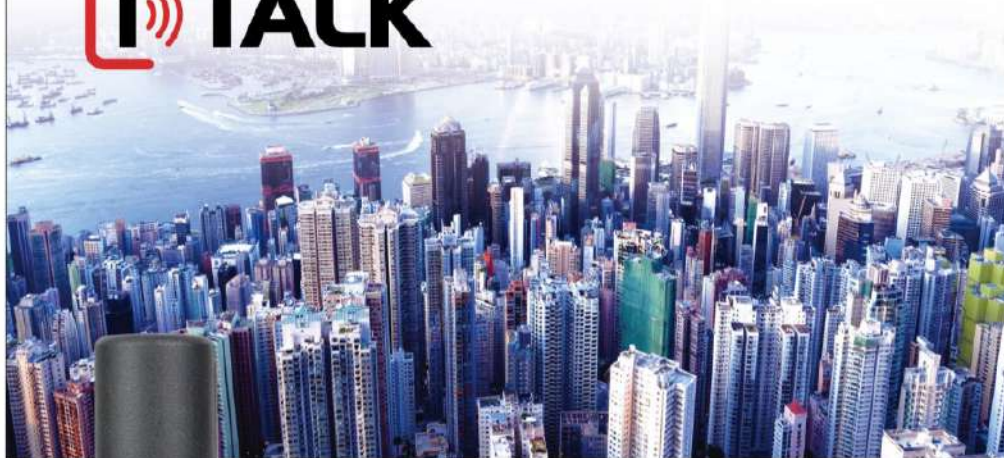

1999

NETWORK WALKIE TALKIE

- Global communication
- Low power alarm
- Group call/ private call/ Nested-group call
- Program/Upgrade OTA mode
- Tx volume adjustable
- Dual Sim

Technical

Network Walkie Talkie **1999**

Working voltage: 3.7V
Battery: 3200mAh
Operation system: RTOS
Solution: ASR1606
Language: English
Display: 1.4inch
Max Tx output power: 23dBm±2dBm@Alupbts
Rx sensibility: -106dBm
Antenna: Built-in antenna
Working temperature: -20~60°C
Storage temperature: -20~60°C
Audio output power: 2W@10% distortion
Size: 127.2x60.6x35.5mm (with antenna)
Weight: 148.9g (battery included)
Earphone: K-type
Charger: Type-C cable

3GPP Band	Send	Receive	Unit
LTE-FDD B1	1920-1980	2110-2170	MHz
LTE-FDD B3	1710-1785	1805-1880	MHz
LTE-FDD B8	880-915	925-960	MHz
LTE-FDD B34	2010-2025	2010-2025	MHz
LTE-TDD B38	2570-2620	2570-2620	MHz
LTE-TDD B40	2300-2400	2300-2400	MHz
LTE-TDD B41	2496-2690	2496-2690	MHz

Accessory



Antenna



Battery



Adapter



TYPE-C cable



Belt clip

