

ICOM

VHF AND UHF TRANSCEIVERS

IC-V86-T
IC-V86
IC-U86

**5W Output Power and
1500 mW Audio**

Made
in
JAPAN

Very High output power plus new antenna provides 1.5 times* more coverage

* Approximately, Wide open space. Communication range may differ depending on operating environment or weather conditions.

More audio, 1500 mW audio output

IP54 and MIL-STD 810G; rugged design against dust, water, vibration and shock. Perfect for outdoor use.

19 hours* of long lasting battery life

* EX Hi power with BP-298. TX : RX : standby = 5 : 5 : 90 (3 sec. : 3 sec. : 54 sec.)
(The Power Save function is set to "P-S.16")


Durable BNC antenna connector

Made in Japan quality and reliability

And more

- User selectable Volume Level, VFO/Memory Channel selection control
- Supplied BC-240, battery charger with a charging control function that prolongs the life of the battery
- Integrated VOX function
- 200 memory channels, 1 Call channel and 6 scan edges
- Built-in CTCSS and DTCSS encoder/decoder and Tone Scan
- Priority, program, memory, skip and tone scanning

**Coverage Area
Comparison**

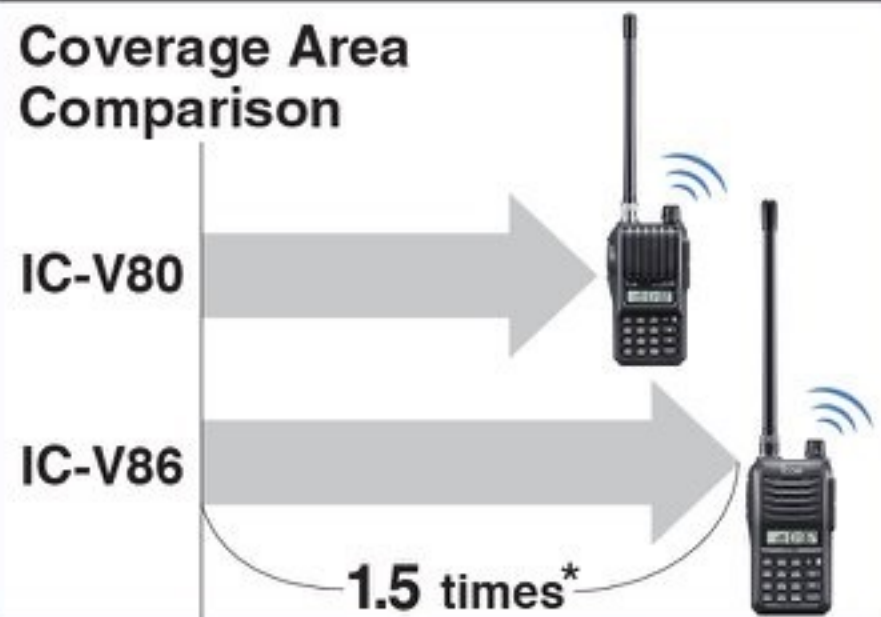

* Wide open space



IC-U86

IC-V86
IC-V86-T

SPECIFICATIONS

GENERAL		IC-V86-T	IC-V86	IC-U86
Frequency range (Guaranteed range)	TX: 144–147 MHz RX: 144–147 MHz		TX: 144–148 MHz RX: 136–174 MHz	TX: 430–450 MHz RX: 400–472 MHz
Type of emissions	F2D, F3E (FM, FM-N)			
Number of channels	207 channels (200 memory channels, 1 call channel and 6 scan edges)			
Antenna impedance	50 Ω			
Power supply requirement	7.5 V DC			
Operating temperature range	–20 °C to +60 °C, –4 °F to +140 °F			
Frequency stability	±2.5 ppm (–20 °C to +60 °C, –4 °F to +140 °F)			
Current drain TX (EX Hi/Hi/Mid/Low) RX (Max. audio)	1.4/1.2/1.0/0.5 A typical 450 mA typ. (INT SP), 200 mA typ. (EXT SP)		1.6/1.5/1.0/0.5 A typical 450 mA typ. (INT SP), 200 mA typ. (EXT SP)	
Dimensions (W×H×D) (Projections not included)	58.6 × 112 × 30.5 mm, 2.3 × 4.4 × 1.2 in (with BP-298)			
Weight (Approximate)	300 g, 10.6 oz (with BP-298, FA-B57V)		290 g, 10.2 oz (with BP-298, FA-B57U)	
TRANSMITTER				
Output power	5.0/3.5/2.5/0.5 W (EX Hi/Hi/Mid/Low)		5/4/2/0.5 W (EX Hi/Hi/Mid/Low)	
Maximum frequency deviation	±5.0 kHz/±2.5 kHz (Wide/Narrow)			
Spurious emissions	Less than –60 dB			
External microphone connector	3-conductor 2.5 (d) mm (1/10")/2.2 kΩ			
RECEIVER				
Sensitivity	0.16 μV		0.12 μV	
Squelch sensitivity	0.14 μV		0.16 μV	
Selectivity (Wide/Narrow)	70 dB		70 dB	
Intermodulation	65 dB			
Audio output power Internal speaker External speaker	1500 mW typical (with 8 Ω load) 550 mW typical (with 8 Ω load)			
External speaker connector	3-conductor 3.5 (d) mm (1/8")/ 8 Ω			

All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	–
Dust Blowing	510.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust and Water	IP54 (Dust-protection, water resistance)

Supplied accessories : (* May differ, depending on transceiver version)

- BP-298/BP-264 battery pack
- BC-240, desktop charger
- BC-242, AC adapter
- MB-124, belt clip
- Antenna*

Countermeasures against Counterfeit Products

The "3D GENUINE Icom label" and "QR Code Genuineness Determination System" are attached for proof of authentication.

Check the Icom website for details : <http://www.icom.co.jp/world/genuine-info/>



Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All trademarks are the properties of their respective holders.

OPTIONS

BATTERY PACKS & CASE		Battery pack type	Capacity	Operating time*
	BP-298	Rechargeable Li-ion	2100 mAh (min.) 2250 mAh (typ.)	Up to 19 hours
	BP-299	Rechargeable Li-ion	3050 mAh (min.) 3150 mAh (typ.)	Up to 27 hours
	BP-264	Rechargeable Ni-MH	1400 mAh	Up to 12.5 hours
	BP-263	AA (LR6) batteries x 6	—	—

* EX Hi power. TX : RX : standby = 5 : 5 : 90 (3 sec. : 3 sec. : 54 sec.) (The Power Save function is set to "P-S.16")

RAPID CHARGERS

BC-240 Rapid charger for BP-298/BP-299
BC-191 Rapid charger for BP-264



DESKTOP CHARGER

BC-192 Regular charger for BP-264



MULTI-CHARGER

BC-214N* For BP-298/BP-299



MULTI-CHARGER

BC-197* For BP-264



* The AD-139/AD-120 charger adapters are supplied with the BC-214N/BC-197, depending on the charger version.

SPEAKER-MICROPHONES



EARPHONE-MICROPHONES



HEADSETS

HS-94LWP Ear-hook type with a waterproof connector

HS-95LWP Behind-the-head type with a waterproof connector

HS-97* Throat type

* Either the VS-4LA or OPC-2004LA is required when using the HS-97



PTT SWITCH CABLE & PLUG ADAPTER CABLE

VS-4LA

For manual PTT operation

OPC-2004LA

For VOX operation



CIGARETTE LIGHTER CABLE



DC POWER CABLE



CHARGER BRACKET



BELT CLIP



ANTENNAS

FA-B45V 144–148 MHz

FA-B57V 160 MHz

FA-B57U 430–450 MHz

PROGRAMMING CABLES

OPC-478UC Handheld to PC USB cable

OPC-474 Handheld to handheld

PROGRAMMING SOFTWARE

CS-V86 Programming software

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com

Your local distributor/dealer:

G. Simon Radio Co., Ltd.

1 อาคารเอ็มดีทาวเวอร์ ชั้น 16 ห้องเอ-ซี2

ช.บางนา-ตราด 25 แขวงบางนา เขตบางนา

กรุงเทพมหานคร 10260

โทร: 0816439181 Fax: 0-2361-8275

Email: info@gsimon.com